
Prolights

DisplayCobTRWDFC_60

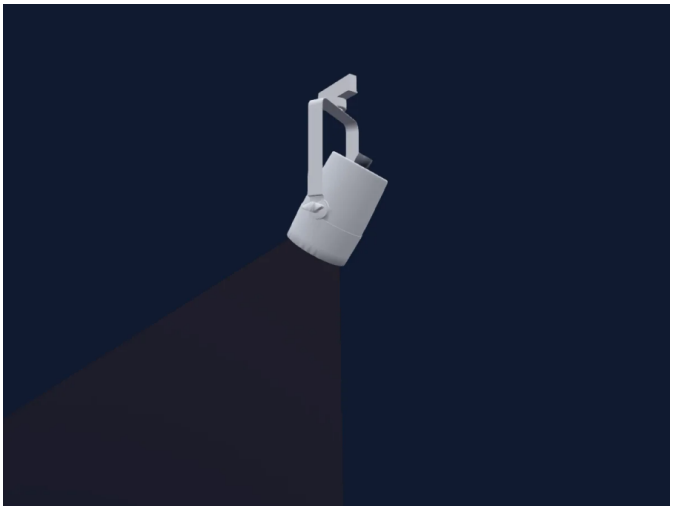

Manufacturer	**Prolights**
Type	**Moving head**
DMX modes	**3**
DMX footprint	**3, 5, 8 channels**
Beam angle	**60°**
Pan range	**360°**
Tilt range	**360°**
Size (W × H × D)	**122 × 163 × 120 mm**
GDTF fixture type	**050A16FB-372F-4BDC-A803-1B…**

Controls

RGB colour mixing · Colour wheel · Strobe · Dimmer

DMX modes

3ch	3 ch
5ch	5 ch
8ch	8 ch

3ch

3 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	

5ch

5 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Red	255	
3	Green	255	
4	Blue	255	
5	Shutter / Strobe	10	0–10 NoFeature 11–255 Strobe · Slow2fast 0.9–15 Hz

8ch

8 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Red	255	
3	Green	255	
4	Blue	255	
5	Shutter / Strobe	10	0–10 NoFeature 11–255 Strobe · Slow2fast 0.9–15 Hz
6	Color Mix Mode	0	0–15 NoFeature 16–255 ColorMacros
7	Color Effects1	0	0–10 RGB mode 11–50 Pulse effect 0-100 51–90 Pulse effect 100-0 91–130 Pulse effect 100-0-100 131–170 Auto fade transition 171–210 Auto snap transition (3 colors) 211–255 Auto snap transition (7 colors)
8	Dimmer Mode	0	0–51 AsFromMenu 52–101 OFF 102–152 Fast 153–203 Middle 204–255 Slow