
Prolights

EclFresnelJTU

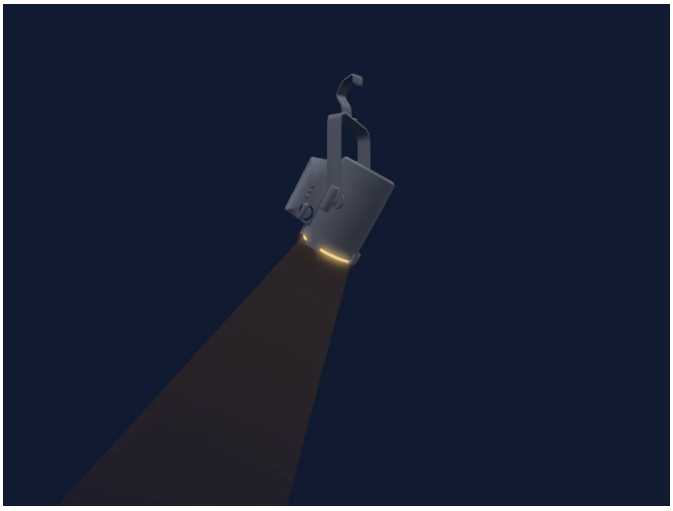

Manufacturer	**Prolights**
Type	**Moving head**
DMX modes	**5**
DMX footprint	**1, 2, 3, 5 channels**
Beam angle	**15-47°**
Pan range	**360°**
Tilt range	**360°**
Size (W × H × D)	**222 × 247 × 231 mm**
GDTF fixture type	**EA5B1A8C-35AF-4182-835C-FB…**

Controls

Effect speed · Strobe · Dimmer

Safety-relevant functions

Built-in effect programmes

DMX modes

1ch	1 ch
2ch	2 ch
2ch_2	2 ch
3ch	3 ch
5ch	5 ch

1ch

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open

2ch

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer

2ch_2

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Shutter / Strobe	10	0–10 Open 11–254 Strobe · Slow 0.5–14.9 Hz 255–255 Strobe · Fast 15 Hz

3ch

3 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter / Strobe	10	0–10 Open 11–254 Strobe · Slow 0.5–14.9 Hz 255–255 Strobe · Fast 15 Hz

5ch

5 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Shutter / Strobe	10	0–10 Open 11–254 Strobe · Slow 0.5–14.9 Hz 255–255 Strobe · Fast 15 Hz
3	Effect	0	0–10 NoFeature 11–70 AutoProgram1 71–130 AutoProgram2 131–255 AutoProgram1
4	Effect Speed	0	0–254 Slow 255–255 Fast
5	Dimmer Mode	0	0–51 AsFromMenu 52–101 Off 102–152 Fast 153–203 MIddle 204–255 Slow