
Prolights

Lumipix6Q

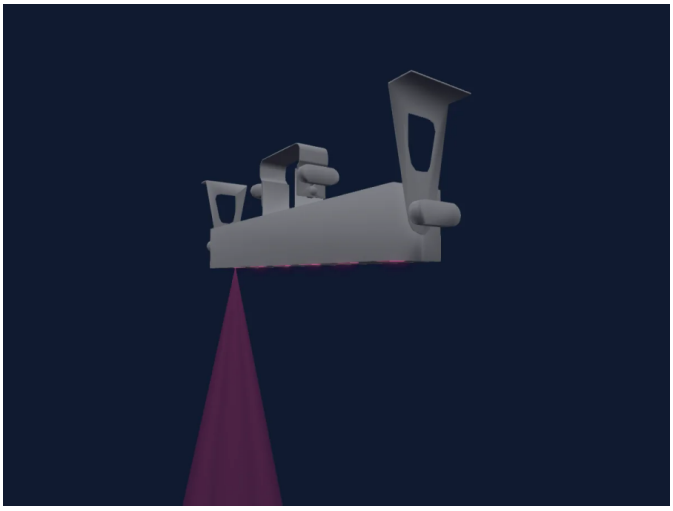

Manufacturer	**Prolights**
Type	**Blinder**
DMX modes	**4**
DMX footprint	**4, 6, 8 channels**
Beam angle	**25°**
Size (W × H × D)	**561 × 139 × 83 mm**
GDTF fixture type	**29F0D48E-EBAA-4F8F-820E-06…**

Controls

Extra LED colours · RGB colour mixing · Effect speed · Strobe · Dimmer

Safety-relevant functions

Strobe · Built-in effect programmes

DMX modes

24ch	4 ch
4ch	4 ch
6ch	6 ch
8ch	8 ch

24ch

4 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	White	255	

4ch

4 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	White	255	

6ch

6 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	White	255	
5	Dimmer	0	0–254 Closed 255–255 Open
6	Shutter / Strobe	0	0–0 Open 1–5 Strobe2Sound 6–10 NoFeature 11–11 Slow Strobe 12–254 Strobe 255–255 Fast Strobe

8ch

8 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	White	255	
5	Shutter / Strobe	0	0–10 Open 11–11 Slow Strobe 12–254 Strobe 255–255 Fast Strobe

8ch (continued)

Ch	Function	Default	DMX values
6	Effect	0	0–10 NoFeature 11–30 Chase_1 31–50 Chase_2 51–70 Chase_3 71–90 Chase_4 91–110 Chase_5 111–130 Chase_6 131–150 Chase_7 151–170 Chase_8 171–190 Chase_9 191–210 Chase_10 211–230 Chase_11 231–250 Chase_12 251–255 Sound
7	Effect Speed	0	0–0 Slow Rate 1–254 Rate 255–255 Fast Rate
8	Dimmer	0	0–254 Closed 255–255 Open