
Spotlight

Hyperion 6c

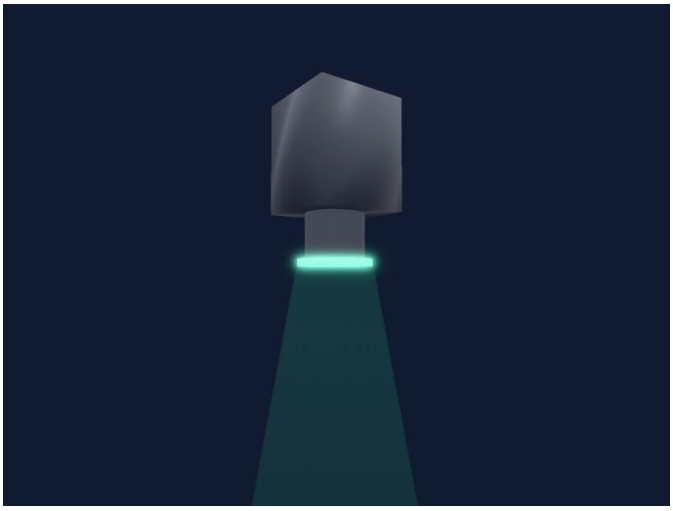

Manufacturer	**Spotlight**
Type	**Spot**
DMX modes	**2**
DMX footprint	**7, 21 channels**
Beam angle	**25°**
Size (W × H × D)	**250 × 300 × 250 mm**
GDTF fixture type	**75F30D33-D38B-4814-BBDE-93…**

Controls

Fan · Extra LED colours · RGB colour mixing · Colour temperature · Colour wheel · Dimmer

Safety-relevant functions

Haze or smoke output · Service functions

DMX modes

HSIC 7ch firmware 1.22	7 ch
Default	21 ch

HSIC 7ch firmware 1.22

7 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	H SBHue	0	
3	H SBHue Fine	0	Fine byte of H SBHue
4	H SBSaturation	0	
5	C TC	0	
6	Shutter / Strobe	0	0–0 Strobe off 1–150 Strobe slow to fast 151–200 Strobe off 201–210 Store custom preset hold five seconds 211–230 Strobe off 231–240 Store fixture parameters hold five seconds 241–255 Strobe off
7	Control1	0	0–5 Service off 6–255 Service selector; function depends on strobe store b...

Default

21 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	Red	255	
4	Red Fine	255	Fine byte of Red
5	Green	255	
6	Green Fine	255	Fine byte of Green
7	Blue	255	
8	Blue Fine	255	Fine byte of Blue
9	Color Add RY	0	
10	Color Add RY Fine	0	Fine byte of Color Add RY
11	Color Add C	0	
12	Color Add C Fine	0	Fine byte of Color Add C
13	Color Add GY	0	
14	Color Add GY Fine	0	Fine byte of Color Add GY
15	Color Preset	0	
16	C CT	0	
17	Green	0	
18	Delay	0	
19	Fan	0	
20	Strobe Rate	0	
21	Control1	0	