
Terbly

TP300

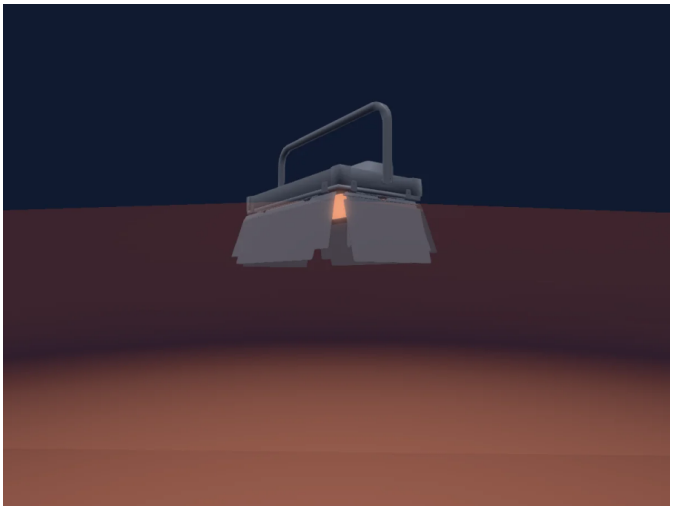

Manufacturer	**Terbly**
Type	**PAR**
DMX modes	**2**
DMX footprint	**8, 13 channels**
Beam angle	**160°**
Size (W × H × D)	**730 × 495 × 441 mm**
GDTF fixture type	**8BFC219B-FD4A-4330-8AC8-87…**

Controls

Extra LED colours · RGB colour mixing · Colour temperature · Strobe · Dimmer

DMX modes

8Channel	8 ch
13Channel	13 ch

8Channel

8 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	White	0	
5	C TO	0	0–4 No function 5–9 2700K 10–14 3200K 15–19 4300K 20–24 5600K 25–29 6500K 30–34 8000K 35–255 2700k-8000K
6	Shutter / Strobe	63	0–62 Closed 63–63 Open 64–94 min Strobe 95–95 max Strobe 96–127 Open 2 128–158 min Pulse 159–159 max Pulse 160–191 Open 3 192–222 Random · min Rnd 1–24.2 Hz 223–223 Random · maxRnd 25 Hz 224–255 Open 4
7	Dimmer	0	0–254 Closed 255–255 Open
8	Dimmer Curve	0	0–20 Standard 21–40 Stage 41–60 TV 61–80 Architectural 81–100 Theatre 101–255 Default

13Channel

13 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Red Fine	255	Fine byte of Red
3	Green	255	
4	Green Fine	255	Fine byte of Green
5	Blue	255	
6	Blue Fine	255	Fine byte of Blue
7	White	0	
8	White Fine	0	Fine byte of White
9	C TO	0	0–4 No function 5–9 2700K 10–14 3200K 15–19 4300K 20–24 5600K 25–29 6500K 30–34 8000K 35–255 2700k-8000K

13Channel (continued)

Ch	Function	Default	DMX values
10	Shutter / Strobe	63	0–62 Closed 63–63 Open 64–94 min Strobe 95–95 max Strobe 96–127 Open 2 128–158 min Pulse 159–159 max Pulse 160–191 Open 3 192–222 Random · min Rnd 1–24.2 Hz 223–223 Random · maxRnd 25 Hz 224–255 Open 4
11	Dimmer	0	0–254 Closed 255–255 Open
12	Dimmer Fine	0	Fine byte of Dimmer
13	Dimmer Curve	0	0–20 Standard 21–40 Stage 41–60 TV 61–80 Architectural 81–100 Theatre 101–255 Default