
Uplus Lighting

Uplus Lighting 1810 IP LED PAR

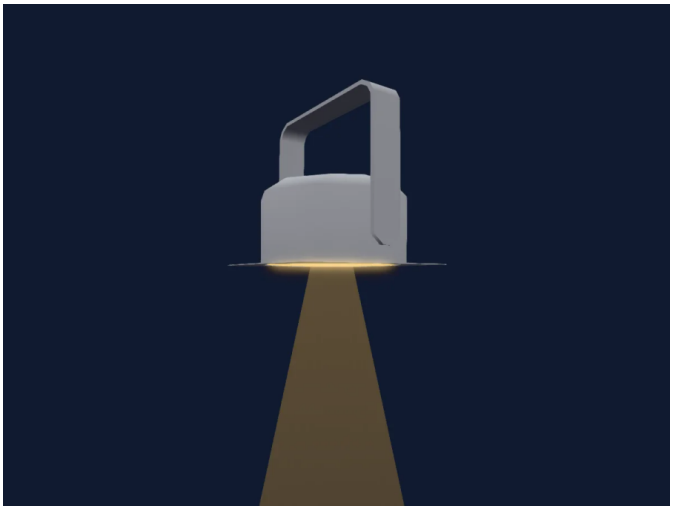

Manufacturer	**Uplus Lighting**
Type	**PAR**
DMX modes	**3**
DMX footprint	**4, 8, 10 channels**
Beam angle	**25°**
Size (W × H × D)	**242 × 210 × 45 mm**
GDTF fixture type	**D648BC73-9AB6-4BDA-9AFA-5…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Strobe · Dimmer

Safety-relevant functions

Strobe

DMX modes

4 Channel DMX	4 ch
8 Channel DMX	8 ch
10 Channel DMX	10 ch

4 Channel DMX

4 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	0	

8 Channel DMX

8 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Red	0	
3	Green	0	
4	Blue	0	
5	White	0	
6	Shutter / Strobe	0	0–13 No Function 14–255 Slow to Fast
7	Color Macro1	0	0–50 No Function 51–100 Colour (func adjust) 101–109 Auto 1 110–119 Auto 2 120–189 No Function 190–199 Auto 3 200–255 No Function
8	Color Macro1Rate	0	

10 Channel DMX

10 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Red	0	
3	Green	0	
4	Blue	0	
5	White	0	
6	Color Macro1	0	0–10 No Func 11–170 Colours 171–255 Col Temp
7	Shutter / Strobe	0	0–13 No Func 14–255 1 to 20hz
8	Color Effects1	0	0–20 No Func 21–30 Auto 1 31–40 Auto 2 41–50 Auto 3 51–60 Auto 4 61–70 Auto 5 71–80 Auto 6 81–90 Auto 7 91–100 Auto 8 101–110 Auto 9 111–120 Auto 10 121–255 No Func
9	Color Wheel	0	

10 Channel DMX (continued)

Ch	Function	Default	DMX values
10	Dimmer Mode	0	0–5 No Func 6–55 Dim Delay off 56–105 Dim Delay Fastest 106–155 Dim Delay Fast 156–205 Dim Delay Slow 206–255 Dim Delay Slowest